



Actively Cooled Laser Bar Stack

A-Stack $\lambda 930-940\text{nm}$


Features:

- Improved cooling efficiency
- No “smile” effect
- Bars on demand
- Central wavelength on demand

Suitable for:

- Hair Removal
- Surgical Cardiology
- Ophthalmology
- Aesthetics
- Odontology
- Material processing
- Gated imaging

A-Stack $\lambda 930-940\text{nm}$ | 1 bar package

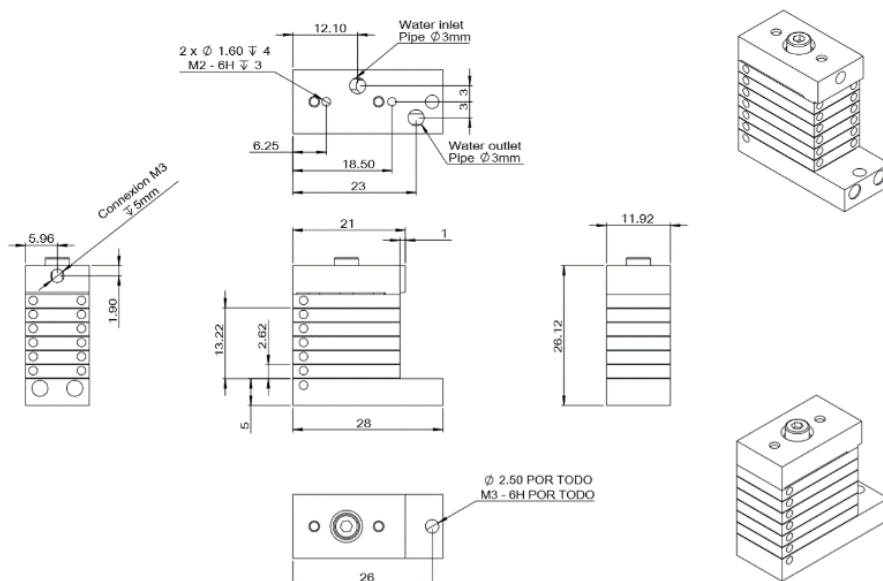

A-STACK / 930- 940nm

Product specification are subject to change without notice.
For complete details, please contact your local MONOCROM sales representative.

MONOCROM S.L.

C/Vilanoveta 6
08800 Vilanova i la Geltrú (Barcelona)
Spain
T. +34 938 149 450
F. +34 938 143 767
E. sales@monocrom.com
www.monocrom.com

A-Stack λ 930-940nm | TECH Specifications


Laser Parameters

Type	actively cooled stack
Wavelength ⁽¹⁾ [nm]	930 - 950
Wavelength tolerance [nm]	± 20
Spectral width [nm]	3
Wavelength shift [nm/K]	0.27
Output power ^(2,3) [W]	CW - up to 120 / QCW - up to 300
Operating current [A]	CW < 120 / QCW < 320
Efficiency coefficient [W/A]	1.2
Voltage @ connectors ⁽⁴⁾ [V]	2 - 30
Bar to bar pitch [mm]	down to 1.5
Optics (optional)	FAC / SAC / BT
Bars per stack ⁽⁵⁾	1 - 15
Smile [μ m]	< 0.3

1. Other wavelengths on request.
2. Expected output power. Can varies based on current and temperature.
3. Specification are subjected to chips availability.
4. Voltage from the power supply must be higher, as due to high current there will be a voltage drop in the cables.
5. Pitch dependent

Macro channels

Our patented solder-free technology is used in our diode bars stacks; no water obstructions thanks to the use of macro-channels



A-STACK / 930- 940nm

Product specification are subject to change without notice.
For complete details, please contact your local MONOCROM sales representative.

UNE EN ISO 9001:2015

MONOCROM S.L.

C/Vilanova 6
08800 Vilanova i la Geltrú (Barcelona)
Spain
T. +34 938 149 450
F. +34 938 143 767
E. sales@monocrom.com
www.monocrom.com